
LASER PROFILOMETER FOR RAILROAD RAILS AND SWITCHERS

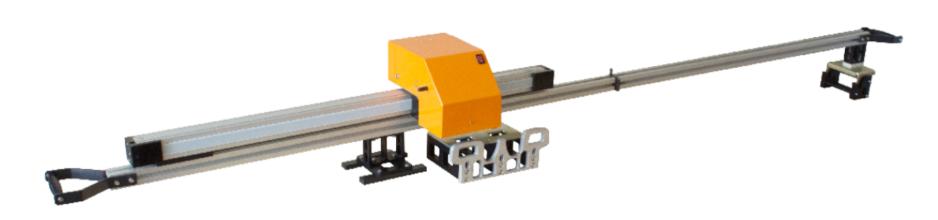

The device consists of frame for device placement on the rails and laser measurement head placed with possibility of linear translation. The measurements are carried out automatically. The measurement result is rails transfer profile.

Parameter	Value
Measurement range, mm	600
Measurement error, mm	±0,1